




二點式三點組合


DKL



規格


型號	DKL-08	DKL-10	DKL-15
接管口徑	Rc (PT) 1 / 4	Rc (PT) 3 / 8	Rc (PT) 1 / 2
油滴下最少流量	25 Nl/min	30 Nl/min	30 Nl/min
使用壓力範圍	0.5 ~ 8 kgf/cm ²		
耐壓力	9.8 kgf/cm ²		
使用溫度範圍	0 ~ +60 °C (不凍結)		
過濾精度	25 μm		
過濾槽容量	60 c.c.		
油槽容量	100 c.c.		

訂購代號

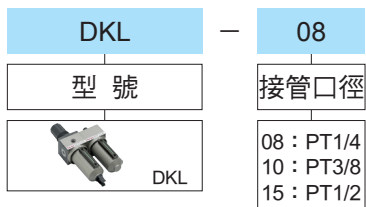


流量特性圖


● DKL-08

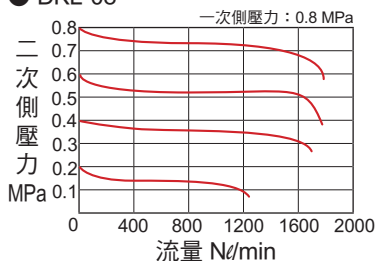

● DSKL-10、15

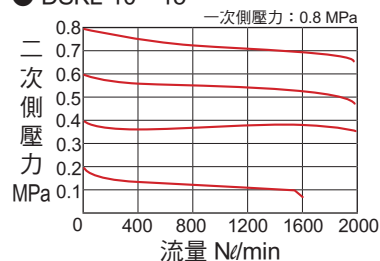

DKL 外型尺寸

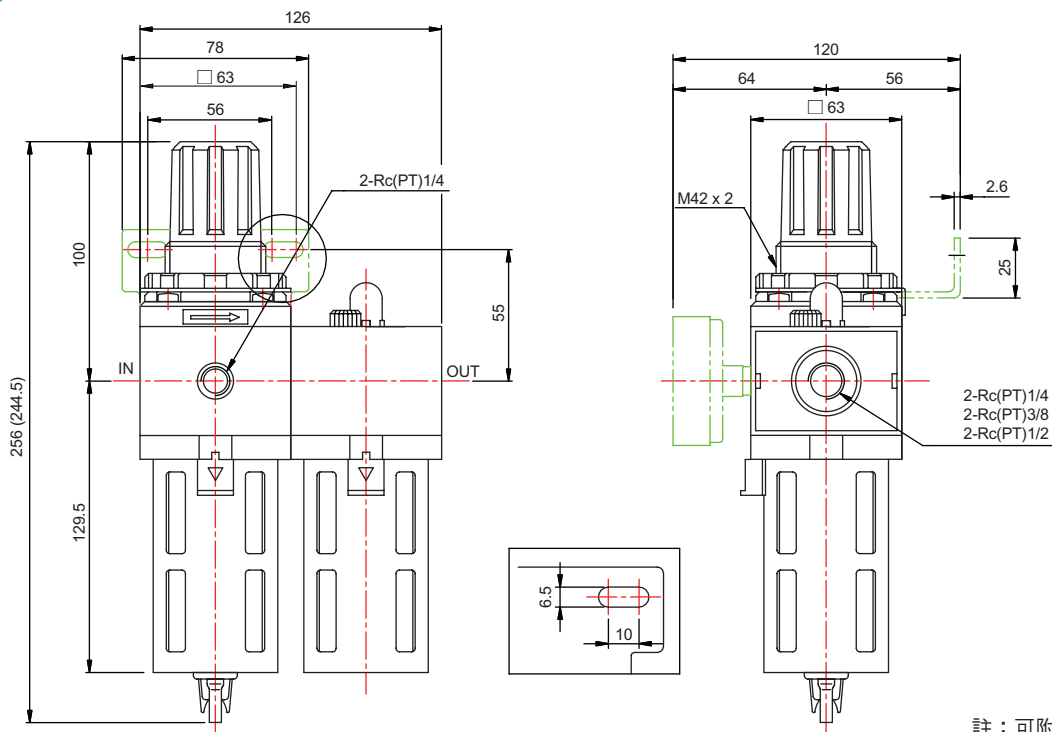

註：可附自動排水